



- For military / governmental / traffic / critical buildings
- Shielded for (nuclear) electro magnetic pulse (also lightning)
- HD / IP Cam with ONVIF
- Integration in existing surveillance systems

E1 & E2 Hardened HD IP Colour Camera

As the threat of a nuclear attack and also the trend to use electro-magnetic weapons (intentional electromagnetic interference – IEMI) are constantly growing, there is demand for CCTV systems, which can survive such attacks. Lightnings in close vicinity also cause high electromagnetic pulses (EMP).

PONTIS (N)EMP cameras offer a special shielding and filtering to withstand the high field strengths, especially magnetic fields, occurring with EMP and NEMP pulses. In addition to the electro-magnet immunity the cameras can also withstand harsh environmental conditions.

There are three versions available:

- In door use (0° to 70 °C)
- Weather proof: IP 64 (-40 °C to +60 °C)
- Extended version with sealed housing for very hot and dusty environment: IP64 (-30 °C to +75 °C)

In most cases these cameras need to be integrated in existing CCTV and surveillance systems. The NEMP camera offers an IP interface, that is compatible with many surveillance software applications (supporting also ONVIF).

The PONTIS NEMP CCTV system is composed of the actual camera inside a weather proof housing and a separate shielded power supply. The data communication (Ethernet) is by fibre optics. All cables for the power supply need to be specially shielded. Inside the camera housing and the power supply there is a special mechanical shielding and high performance filters.

Features:

- Protected against class E1 & E2 pulse (short & intermediate)
- Optional remotely controlled Pan/Tilt
- Data communication (Ethernet) via fibre optic cables
- IP camera with ONVIF support
- Extended features: manual iris control, including wide dynamic range, Long exposure , image stabiliser
- HD video
- Weather protection IP65
- 24 / 7 operation

Accessories:

Required:

- Power supply (hardened)
- Fibre optic cables

Optional:

- Pan/Tilt unit (hardened)
- Sun shield


Applications:

- Traffic surveillance (lightning safe)
- Object surveillance in critical environments
- Military and governmental buildings

(N)EMP Cam

Technical Data

Video signal system	H.264, MJPEG, MPEG-4 (IP Cam, ONVIF support)
Resolution	1,920 x 1,080 Full HD
Minimum illumination	0,3 Lux @ 1.65 color
Zoom	f4.44 – 142.6 mm: 32 x optical (motorized), 16 x digital
Focus	automatic / manual
White balance	automatic
Image stabilisation	On/Off
Glas fibre	50/125 µm glass fibre with ST-connectors
Operating temperature / humidity / weather proof	– In door use (0° to 70 °C) – Weather proof: IP 64 (-40 °C to +60 °C) – Extended version: IP64 (-30 °C to +75 °C)
External dimensions ID	590 x 175 x 168 mm (L x W x H)
External dimensions EXT	600 x 200 x 219 mm (L x W x H)
Weight	approx. 15 kg
Camera supply	24 VAC, 50 / 60 Hz
Power supply (hardened)	115 / 230 VAC, 50 / 60 Hz
Immunity	Short pulse E1 & intermediate pulse E2
Compliance	MIL-STD-188-125-1
Pan / Tilt (hardened)	external, option; Pan 350 °, Tilt -80 /+20 °, max. load 25 kg

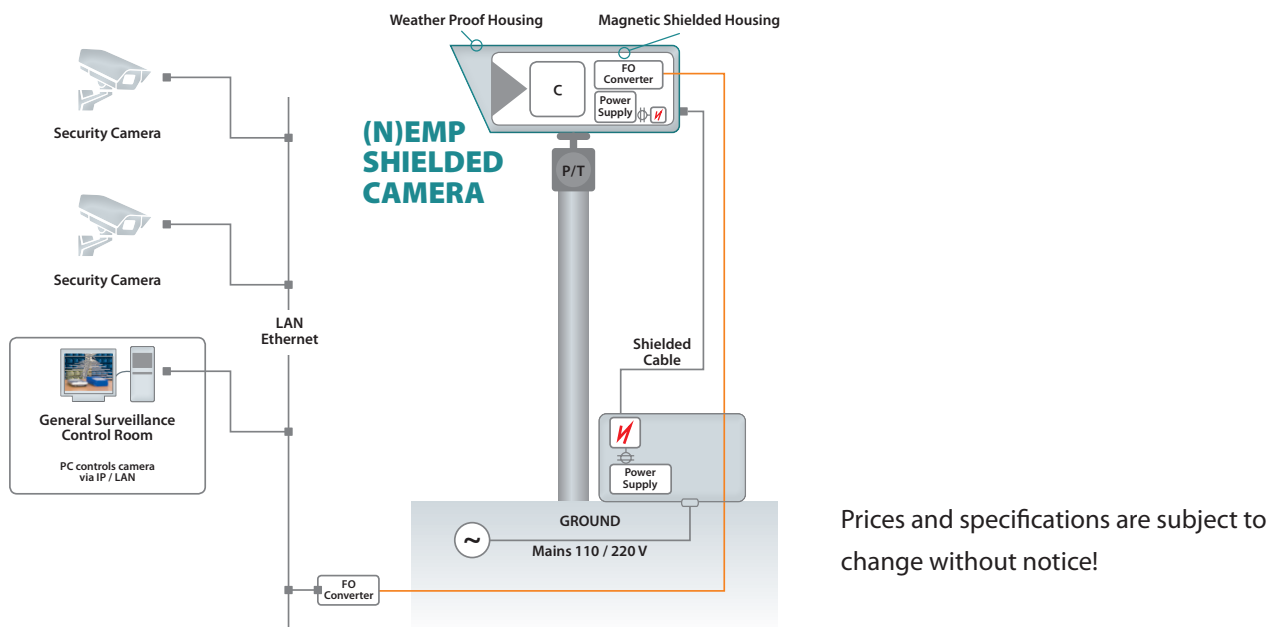

Sales partner for USA and Canada:



HV TECHNOLOGIES, Inc.
8526 Virginia Meadows Drive
Manassas, VA 20109
United States

Phone +1(703) 365 23 30
Fax +1(703) 365 23 31
emcsales@hvtechnologies.com